

NORTHLAND GARAGE DOORS




ST150 & ST175 1.5" & 1.75" Commercial Polyurethane Insulated Steel Doors

- Polyurethane insulation is zero-ozone depleting and provides higher thermal properties which result in significant energy savings
- Insulated sections fabricated from pre-painted, hot dipped galvanized steel sheets with rigid polyurethane insulation core, face sheet stucco embossed and rib reinforced
- Cavity-free, uniform insulation ensures excellent adhesion to the sheet metal resulting in an exceptional strength to weight ratio that qualifies for a wide range of applications
- Sections feature thermal break, steel-polyurethane-steel sandwich formed in a computer-controlled continuous process
- Sections are evenly filled using a continuous process with CFC/HCFC-free polyurethane insulation



PRODUCT SPECIFICATIONS

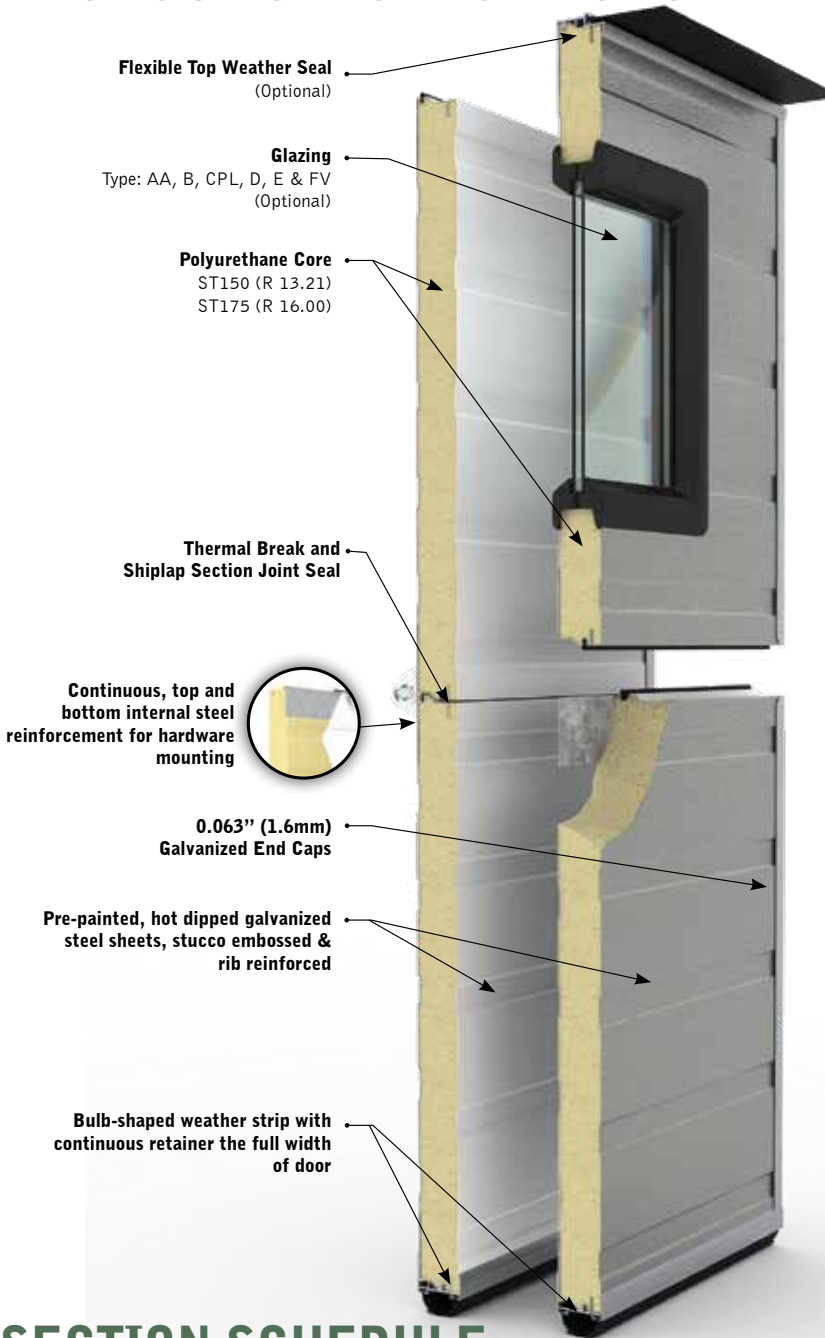

SECTION DETAILS

SECTION THICKNESS

ST150 1.50" (38mm) **ST175** 1.75" (45mm)

THERMAL VALUE OF SECTIONS*

T150 R13.21 ft² hF/Btu **T175** R16 ft² hF/Btu

FACE SHEET PROFILE Ribbed

FACE SHEET THICKNESS

ST150 0.016" (0.41mm) **ST175** 0.019" (0.48mm)

MAXIMUM OPENING WIDTH**


ST150 16' (4877mm) **ST175** 32' (9754 mm)

MAXIMUM OPENING HEIGHT 22' (6706mm)

FINISH Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



GLAZING OPTIONS

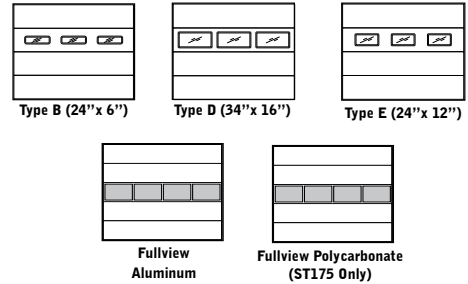

WARRANTY

The Northland Garage Door Exclusive Warranty program can be obtained from your local dealer.

*Thermal Values Calculated. **For larger sizes, please consult dealer.

SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1" (2159mm to 2464mm)	4	8'-0" to 9'-2" (2438mm to 2794mm)	2
8'-2" to 10'-1" (2489mm to 3073mm)	5	9'-3" to 12'-2" (2819mm to 3708mm)	3
10'-2" to 12'-1" (3099mm to 3683mm)	6	12'-3" to 16'-2" (3734mm to 4928mm)	4
12'-2" to 14'-1" (3708mm to 4293mm)	7	16'-3" to 19'-2" (4953mm to 5842mm)	5
14'-2" to 16'-1" (4318mm to 4902mm)	8	19'-3" to 24'-2" (5867mm to 7366mm)	6
16'-2" to 18'-1" (4928mm to 5512mm)	9	24'-3" to 28'-2" (7391mm to 8585mm)	7

Professionally installed and serviced by:



10932 Longwoods Road,
Delaware, ON
519-652-8312 • 1-800-263-7010
info@stewarddoor.com